













- Slim and Low profile (41mm)
- Fanless design, 1000W convection
- · Withstand 300VAC surge input for 5 seconds
- · Built-in active PFC function
- -30~+70°C working temperature
- Output voltage and constant current level programmable
- Protections: Short circuit / Overload / Over voltage / Over temperature
- · Built-in remote ON-OFF control
- · DC OK active signal
- Operating altitude up to 5000 meter (Note.5)
- · LED indicator for power on
- · 3 years warranty













Certificates

- Safety: UL/EN62368-1, EN61558, EN60335-1
- EMC: EN 55032 / 55024


Applications

- Industrial automation machinery
- Industrial control system
- · Mechanical and electrical equipment
- · Electronic instruments, equipments or apparatus
- · Household appliances

Description

UHP-1000 series is a 1000W single-output slim type power supply with 41mm of low profile design. Adopting the full range 90~264VAC input, the entire series provides an output voltage line of 12V,24V,36V and 48V. In addition to the high efficiency up to 96%, that the whole series operates from -30°C ~ 70°C under air convection without fan. UHP-1000 has the complete protection functions and 5G anti-vibration capability; It is complied with the international safety regulations such as TUV EN62368-1, UL62368-1, EN61558-1 and EN60335-1. UHP-1000 series serves as a high performance power supply solution for various industrial applications.

Model Encoding






SPECIFICATION

| MODEL | | UHP-1000-12 | UHP-1000-24 | UHP-1000-36 | UHP-1000-48 | |
|-----------------|---|---|------------------------------------|--------------------------------|---|--|
| | DC VOLTAGE | 12V | 24V | 36V | 48V | |
| | RATED CURRENT | 80A | 42A | 28A | 21A | |
| | RATED POWER(convection) | 960W | 1008W | 1008W | 1008W | |
| | RIPPLE & NOISE (max.) Note.2 | 150mVp-p | 150mVp-p | 200mVp-p | 250mVp-p | |
| | , , | By built-in potentiometer, SVR | 11 | | | |
| OUTPUT | VOLTAGE ADJ. RANGE | 12~14.4V | 24~28.8V | 36~43.2V | 48~57.6V | |
| | VOLTAGE TOLERANCE Note.3 | ±1.0% | ±1.0% | ±1.0% | ±1.0% | |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | |
| | LOAD REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | |
| | SETUP, RISE TIME | | 00ms,50ms/115VAC at full load | ±0.370 | ±0.376 | |
| | HOLD UP TIME (Typ.) | | , | | | |
| | ,, | 12ms/230VAC 12ms/115VAC 90 ~ 264VAC 127 ~ 370VD | | | | |
| | | 47 ~ 63Hz | <u> </u> | | | |
| | FREQUENCY RANGE | PF≥0.95/230VAC PF≥0.99/115VAC at full load | | | | |
| INPUT | POWER FACTOR (Typ.) | | | | | |
| | EFFICIENCY (Typ.) | 94.5% | 95% | 95% | 96% | |
| | AC CURRENT (Typ.) | 10.1A/115VAC 5.3A/230VAC | | | | |
| | INRUSH CURRENT (Typ.) | | /230VAC | | | |
| | LEAKAGE CURRENT | <0.75mA / 240VAC | | | | |
| | OVERLOAD | 105~125% rated output power | | | | |
| | OVERLOAD | Protection type: Constant current limiting, recovers automatically after fault condition is removed | | | | |
| PROTECTION | SHORT CIRCUIT | | ers automatically after fault cond | | | |
| . NOILCIION | OVER VOLTAGE | 14.5 ~ 16V | 29 ~ 33V | 43.5 ~ 49V | 59 ~ 66V | |
| | J.ER TOLIAGE | Protection type :Shut down O/P | voltage,re-power on to recover | 7 | | |
| | OVER TEMPERATURE | Protection type :Shut down O/P | voltage, recovers automatically | after temperature goes down | | |
| | OUTPUT VOLTAGE | | allowable to 50 ~ 120% of nom | inal output voltage | | |
| | PROGRAMMABLE(PV) Note 5 | | | | | |
| FUNCTION | OUTPUT CURRENT | Adjustment of constant current level is allowable to 20 ~ 100% of rated current. | | | | |
| 1 0110 11011 | | Please refer to the Function Manual. Power ON: "Low" <0 ~ 0.5V or Short circuit Power OFF: "Hi" >2 ~ 5V or Open circuit | | | | |
| | REMOTE ON/OFF CONTROL | | | HI >2 ~ 5V or Open circuit | | |
| | AUXILIARY POWER | 12V@0.5A tolerance±10%, rippl | | 0.4\/ Diagon refer to the F | action Manual | |
| | DC-OK SIGNAL | | n = 2.4 ~ 5V ; PSU turn off = 0 ~ | 0.4 V. Please relei to the Ful | iction Manual. | |
| | WORKING TEMP. | -30 ~ +70°C (Refer to "Derating" | Curve") | | | |
| ENVIRONMENT | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | |
| LITTINOMILITI | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH non- | condensing | | | |
| | TEMP. COEFFICIENT | ±0.03%/℃ (0~50°€) | COmin coch clans V V 7 avec | | | |
| | VIBRATION | 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes | | | | |
| | SAFETY STANDARDS | | N61558-1, EN60335-1, EAC TP 1 | C 004 approved | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC I/P-FG:2K | | | | |
| | ISOLATION RESISTANCE | I/P-O/P, I/P-FG,O/P-FG:100M C | | I = | | |
| | | Parameter | Standard | | Level / Note | |
| | | Conducted | EN55032 (CISPR32) | | | |
| SAFETY & | EMC EMISSION | Radiated | EN55032 (CISPR32) | | | |
| EMC (Note.6) | | Harmonic Current | EN61000-3-2 | Class | A | |
| (Note.o) | | Voltage Flicker | EN61000-3-3 | | | |
| | | EN55024, EN61000-6-2 | | | | |
| | | Parameter | Standard | | Level / Note | |
| | | ESD | EN61000-4-2 | | 3, 8KV air ; Level 2, 4KV contact | |
| | | Radiated | EN61000-4-3 | Level | | |
| | EMC IMMUNITY | EFT / Burst | EN61000-4-4 | Level | · | |
| | | Surge | EN61000-6-2 | 2KV/I | Line-Line 4KV/Line-Earth | |
| | | Conducted | EN61000-4-6 | Level | 3 | |
| | 7 | Magnetic Field | EN61000-4-8 | Level | | |
| | | Voltage Dips and Interruptions | EN61000-4-11 | | dip 0.5 periods, 30% dip 25 periods interruptions 250 periods | |
| | MTBF | K hrs min. MIL-HDBK-217F (25°C) | | | | |
| OTHERS | DIMENSION | 240*115*41mm (L*W*H) | | | | |
| | PACKING | kg; pcs/ kg/ CUFT | | | | |
| NOTE | Ripple & noise are measure Tolerance includes set up t Derating may be needed ur PV/PC functions when user The power supply is conside a 360mm*360mm metal pla perform these EMC tests, p | ally mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. red at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation. under low input voltages. Please check the derating curve for more details. | | | | |



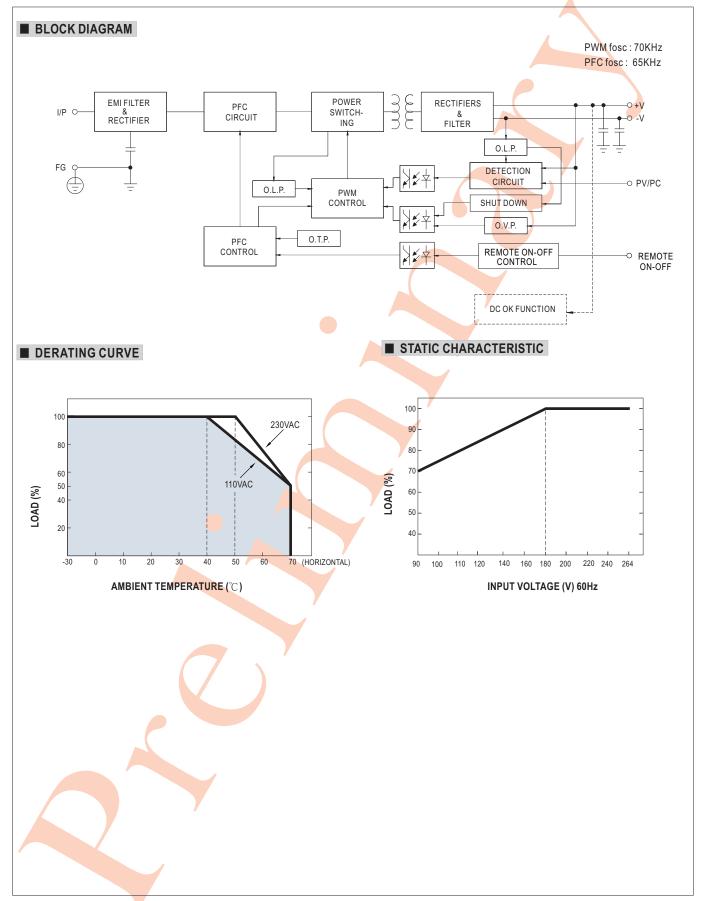





■ FUNCTION MANUAL

1.Output Voltage Programming (or, PV / remote voltage programming / remote adjust / margin programming / dynamic voltage trim)


In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed by applying EXTERNAL VOLTAGE.

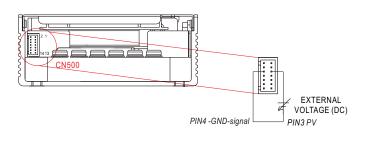

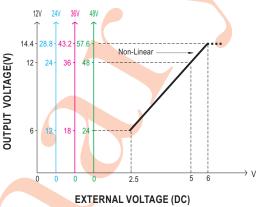


2. Output Current Programming (or, PC / remote current programming / dynamic current trim)

※ The output current can be trimmed to 20~100% of the rated current by applying EXTERNAL VOLTAGE.

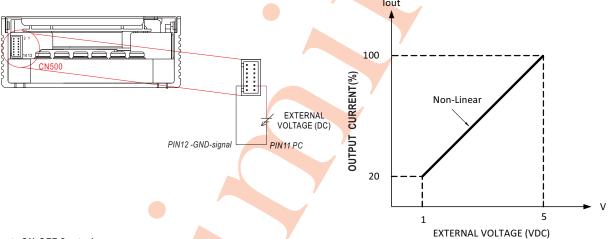

3.Remote ON-OFF Control


The power supply can be turned ON/OFF individually or along with other units in parallel by using the "Remote ON-OFF" function.

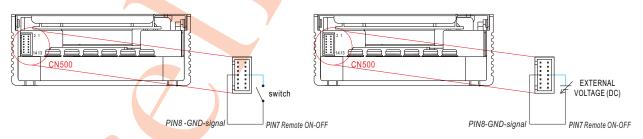

| Remote ON-OFF | Power Supply Status |
|-----------------------------|---------------------|
| "Low" <0~0.5V or Short circ | cuit ON |
| "Hi" >2~5V or Open circuit | OFF |


4.DC-OK Signal

DC-OK signal is a TTL level signal. The maximum sink current is 10mA and the maximum external voltage is 5.6V.

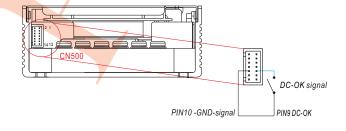

| DC-OK signal | Power Supply Status | |
|---------------|---------------------|--|
| "Hi" >2.4~5V | ON | |
| "Low" <0~0.4V | OFF | |



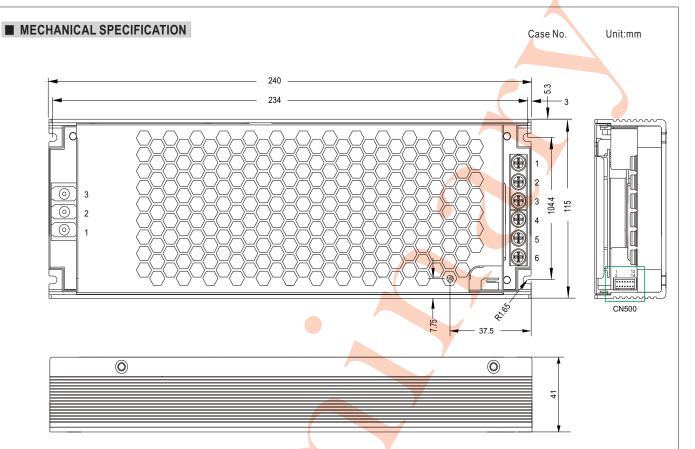

AC Input Terminal (TB1) Pin NO. Assignment

| Pin No. | Assignment | Terminal | Max mounting torque |
|---------|------------|-------------------------|---------------------|
| 1 | AC/L | (DEGSON) DG28C-B-03P | |
| 2 | AC/N | | 5Kgf-cm |
| 3 | ÷ | | |

DC Output Terminal (TB2, TB3) Pin NO. Assignment

| Pin No. | Assignment | Terminal | Max mounting torque |
|---------|------------|-------------|---------------------|
| 1,2,3 | +V | (MW) | |
| 4,5,6 | -V | MEL-400-03P | 8Kgf-cm |

**Control Pin No. Assignment(CN500): HRS DF11-14DP-2DS or equivalent




| Mating Housing | HRS DF11-14DS or equivalent |
|----------------|-----------------------------|
| Terminal | HRS DF11-**SC or equivalent |

| | Function | | | |
|--------------|------------------|---|--|--|
| | | Description | | |
| 1,3 | PV | Connection for output voltage programming. | | |
| 2 | PV-DIS | Short connecting between PV (pin1) and PV-DIS (pin2) if output voltage programming function is not activated. | | |
| 4,8,10,12 GN | ND (Signal) | Negative output voltage signal. | | |
| 5 + | +12V-AUX | Auxiliary voltage output, 10.6~13.2V, referenced to GND-AUX (pin6). | | |
| 5 + | FIZV-AUX | The maximum load current is 0.5A. This output is not controlled by "Remote ON-OFF". | | |
| 6 G | GND-AUX | Auxiliary voltage output GND. | | |
| 6 6 | | The signal return is isolated from the output terminals (+V & -V). | | |
| 7 | Remote ON-OFF | The unit can turn the output ON/OFF by electrical signal or dry contact between Remote ON/OFF. | | |
| ′ 0 | | Short (0 ~ 0.5V): Power ON; Open (2 ~ 5V): Power OFF; The maximum input voltage is 5.5V. | | |
| | | Low (0 ~ 0.4V): When the Vout? 90%? 5%. | | |
| 9 | DC-OK | High (2.4 ~ 5V): When Vout? 90%? 5%. | | |
| | | The maximum sourcing current is 10mA and only for output. | | |
| 11 | PC | Connection for constant current level programming. | | |
| 13 | Vccs | Positive output voltage signal . | | |
| 14 | PC-DIS | Short connecting between Vccs (pin13) and PC-DIS (pin14) if output current programming function is not activated. | | |



Operate with additional aluminum plate

In order to meet the "Derating Curve" and the "Static Characteristics", UHP-1000 series must be installed onto an aluminum plate (or the cabinet of the same size) on the bottom. The size of the suggested aluminum plate is shown as below. And for optimizing thermal performance, the aluminum plate must have an even and smooth surface (or coated with thermal grease), and UHP-1000 series must be firmly mounted at the center of the aluminum plate.

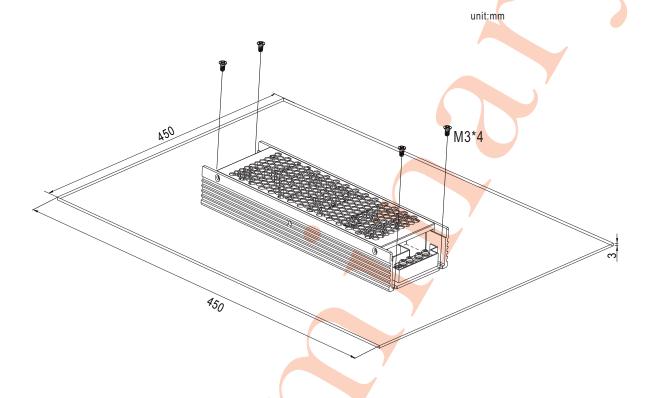

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html